

BLS 12/24C BATTERY TEST BANK

String Name: TEST BANK 1
Battery Name: FIAMM TEST BANK
Location Name: BLS 12 24C
Model Number: FIAMM 12VDC 80AH
Number of Cells: 6
Install Date: 05/09/2013
Read Date: 05/13/2012

Threshold:

- High Cell Voltage: 2.900
- Low Cell Voltage: 1.500
- High Cell Resistance: 2000
- Low Cell Resistance: 1000
- Intercell Resistance 1: 10000
- Intercell Resistance 2: 10000
- Intercell Resistance 3: 10000
- Intercell Resistance 4: 10000
- High Temperature: 82.0
- Low Temperature: 62.0
- High Specific Gravity: 0.000
- Low Specific Gravity: 0.000

Temperature Units: F
Charger Frequency: 60 Hz

BLS 12/24C BATTERY TEST BANK

String Name: TEST BANK 1

Read Date: 05/13/2012

<u>Cell #</u>	<u>Voltage</u>	<u>Internal Res</u>
1	2.288	5289
2	2.289	6459
3	2.193	19631
4	2.296	4915
5	2.289	5205
6	2.298	7785

BLS 12/24C BATTERY TEST BANK

String Name: TEST BANK 1


Read Date: 05/13/2012

Summary:

	<u>Voltage</u>	<u>Internal Res</u>
<u>High</u>	2.298	19631
<u>Avg</u>	2.275	8214
<u>Low</u>	2.193	4915

Overall Voltage: 13.6

TEST BANK 1
Read Date: 05/13/2012

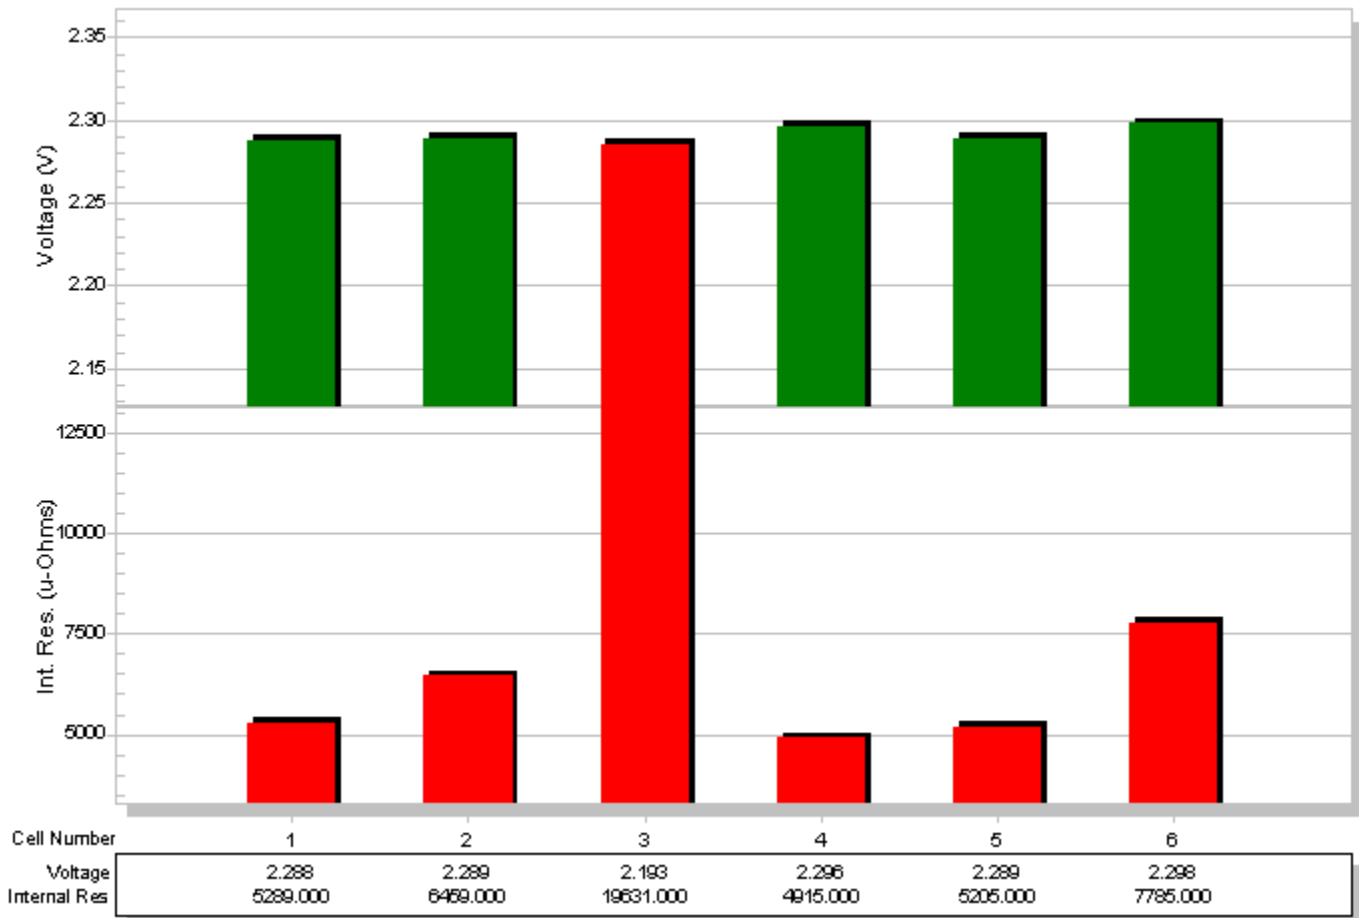

Comments:

BLS 12/24C BATTERY TEST BANK

String Name: TEST BANK 1

Read Date: 05/13/2012

05/13/2013

READINGS INDICATE CLEARLY THAT CELL# 3 IS OUT OF SPECS AND WILL BE REPLACED AND LEFT CHARGING 24HRS. AND READINGS WILL BE COMPARE PRIOR TO DISCHARGE.